
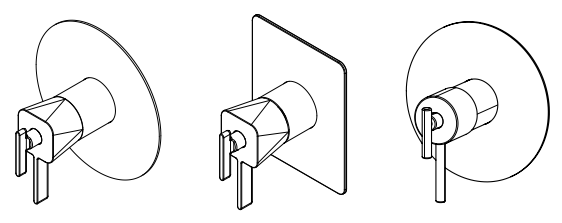



ISTRUZIONI DI MONTAGGIO
INSTALLATION INSTRUCTIONS
INSTRUCTIONS DE MONTAGE

TERMOSTATICO DOCCIA INCASSO COASSIALE
COAXIAL THERMOSTATIC SHOWER
MITIGEUR DOUCHE THERMOSTATIQUE À ENCASTRER COASSIALE




1 VIA/1 WAY/1 VOIE



2 VIE/2 WAYS/2 VOIES



MISCELATORE TERMOSTATICO COASSIALE BORDO VASCA 2 VIE
DECK MOUNTED 2 WAYS COAXIAL THERMOSTATIC BATH MIXER
MITIGEUR THERMOSTATIQUE COAXIAL POUR BAIN SUR GORGE 2 SORTIES

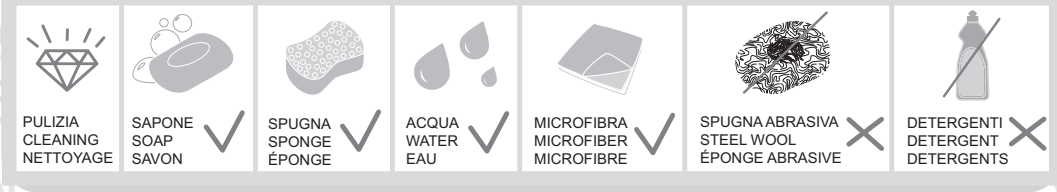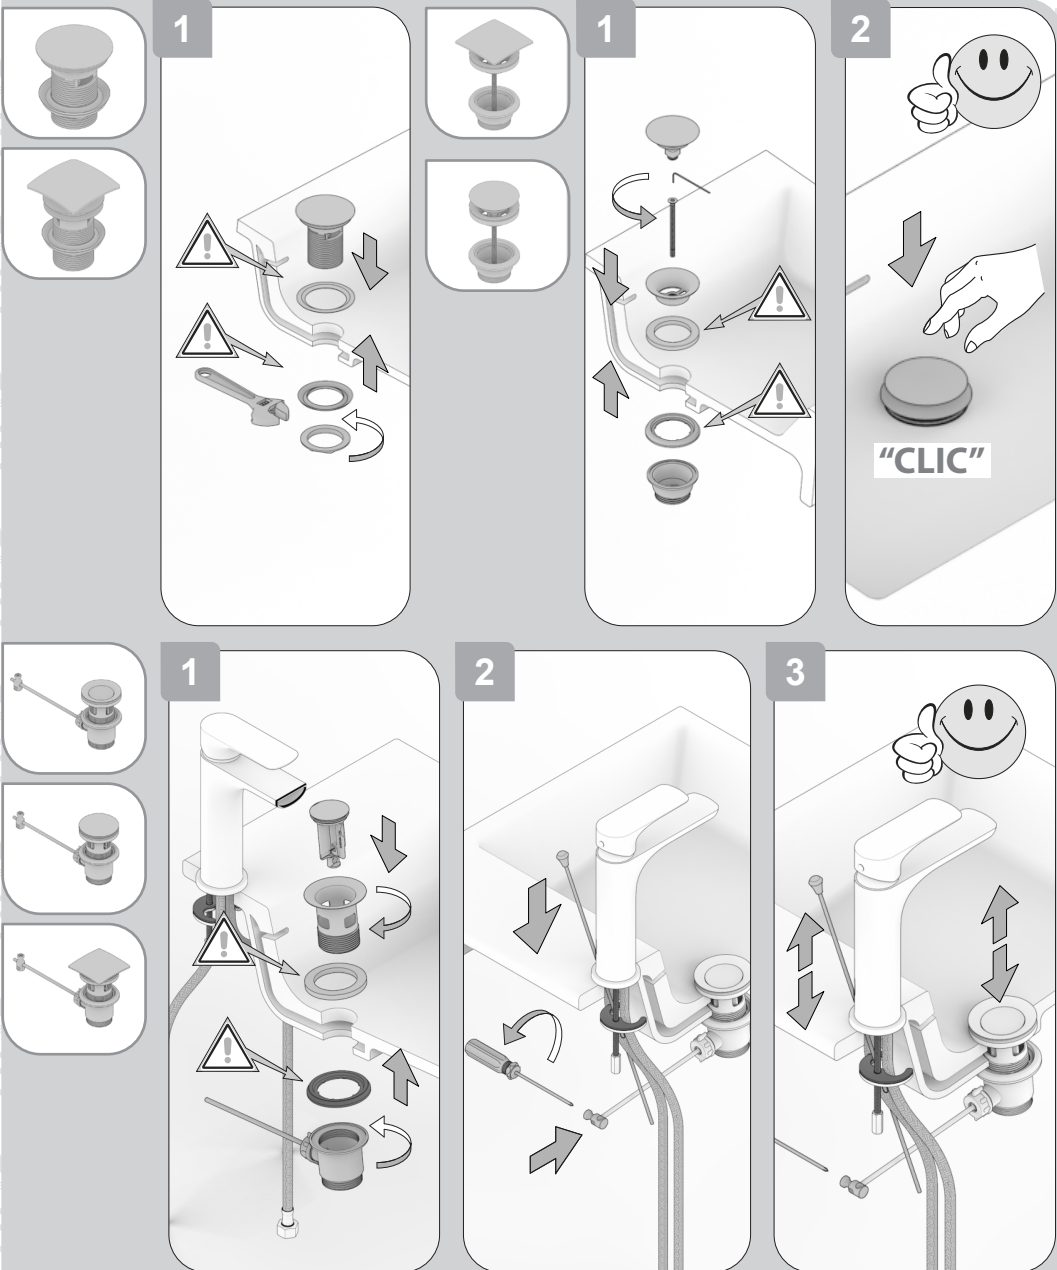

A54066N

OK
3 Bar - 45 psi

MIN.
1 Bar
14.5 psi

MAX.
5 Bar
75 psi

°C

— MAX 80°C - 175°F
— OK 65°C-150°F
— MIN 15°C-60°F

Eseguire il lavaggio della tubazione come suggerisce la normativa DIN 1988 / EN 1717.
To complete the installation flush out both hot and cold water supply.
Rincer l'installation complete conformément à la réglementation et aux normes.

Informazioni
Informations
Informations

Manutenzione
Maintenance
Entretien

Prestare attenzione
Pay attention
Prêter attention

Installazione corretta
Correct installation
Montage correcte

Altezze consigliate
Recommended heights
Hauteurs recommandées

2150

1200

200

1-2 VIE
1-2 WAYS
1-2 VOIES

1

Min. 150

Min. 120

2

Parete Finita
Finished Wall
Mur Fini

MAX

MIN

3

Warning icon

4

Warning icon

5

Warning icon

6

Warning icon

7

OFF

38°

Warning icon

